


GV-VD550IR

3-AXIS GIMBAL IR VARI-FOCAL DAY & NIGHT VANDAL RESISTANT DOME CAMERA



FEATURES

- SONY 1/3" Super HAD(EX-view) Color CCD.
- High Resolution 550TV-Lines(Color), 580TV-Lines(B/W)
- Day/Night Filter Change and Vari-Focal Aspherical DC Auto Iris 3.8~9.5mm F1.2 Lens Built-in.
- Color & B/W Auto Switchable by photocell and sensitivity.
- DIP Switch control of Color & B/W changing time, Flicker, BLC and White Balance.
- DC Iris Control Level Volume Built-in.
- CDS Photocell Auto Switching IR-LED Control (18pcs LEDs).
- True 3-Axis Gimbal Bracket (2-Pan, 2-Tilt).
- Vandal Resistant & Weatherproof Housing (IP66).
- 12VDC/24VAC Dual Voltage

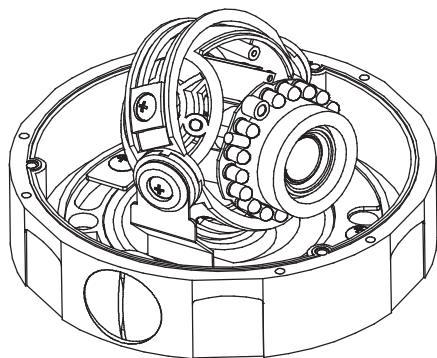

SPECIFICATIONS

- Image Sensor: "1/3" Interline transfer type color CCD (Sony)"
- Effective Pixels: 768H x 494V (380K pixels)
- Scanning System: 525 Lines 2:1 Interlace
- Scanning Frequency: "15.734KHz (H), 59.94Hz (V)"
- Resolution: "550 TV-Lines (Color) , 580TV-Lines (B/W)"
- Shutter Speed: 1/60 sec.
- S/N Ratio: More than 48dB (AGC Off)
- Sync. System: Internal
- Min. Illumination: "0.5 Lux(Color), 0Lux(B/W)"
- White Balance: ATW/AWC selectable
- AGC: Built-in
- Video Output: VBS 1.0 Vp-p (75_ Load)
- Lens: "3.8~9.5mm Vari-Focal, DC Auto Iris F1.2 Day & Night Lens"
- Power Supply: AC24V \pm 10%/ DC12V \pm 10%
- Power Consumption: "Normal: 160mA, Max.(IR-LED ON): 320mA (DC12V)"
- Operating Temp.: 14° ~ 122°F (-10° ~ +50°C)
- Operating Humidity: Max. 90% RH
- Dimension: 5.71 (ø)" x 3.94" (L) (145(ø) x 100(L) mm)
- Complies with FCC Part 15

